

CHARACTER:

1.Physical performance

- a、 Low density high filling ability
- b、 Good mechanical properties
- c、 The fine aging resistance, resistance to weather resistance, heat resistance, ozone, acid and alkali resistant, resistance to water vapor
- d、 In the 150 200 °C can be short or intermittent use
- e、 Of high resistance to chemicals

2.Electrical Properties

- a、 Electrical insulation good
- b、 Good the dielectric properties

3.Processing properties

- a、 Using the hot extrusion processing
- b、 Can be twisted pair and multi-core
- c、 According to UL standard design

4.Environmental protection

- a、 ROHS/REACH compliant


SHOULD BE USED:

Motor Leads and Internal Wiring of Appliances.

REFERENCE:

UL758-2010、 UL1581-2009

Outline:

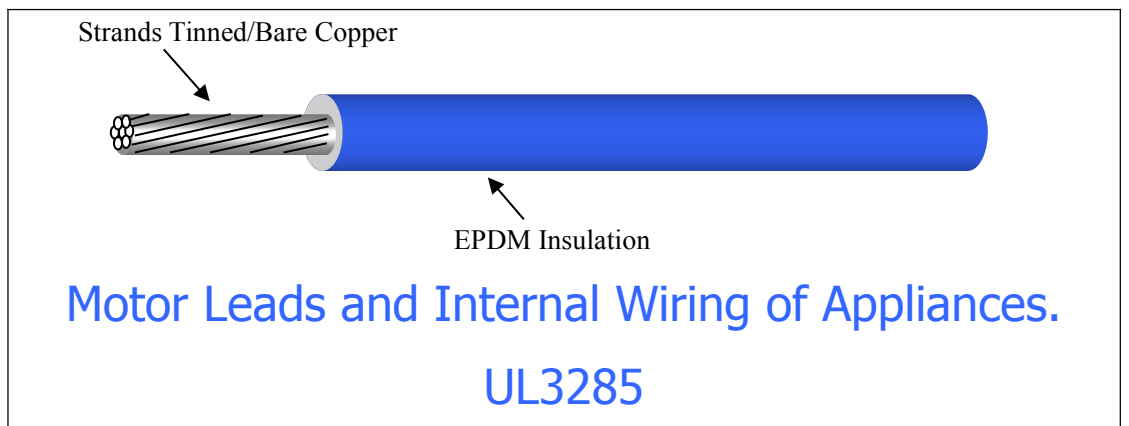

Wire structure description:
 Conductor: Tinned /Bare copper ;
 Insulation materials: EPDM Insulation

Motor Leads and Internal Wiring of Appliances. . Conductor temperature not over 125°C
 EPDM insulated wire
 Rated temperature: 125°C rated voltage: 300V

STYLE	standard AWG	Conductor size (No./ mm) ±0.005mm	Conductor resistance 20°C (Ω/Km)	Conductor Dia.(mm)	insulation thickness (mm)		Overall diameter (mm)	
					Nom.	Min.	Min	Max
3285	14	41/0.254	8.96	1.88	0.76	0.69	3.40	±0.15
	16	26/0.254	14.60	1.50	0.76	0.69	3.00	±0.10
	18	16/0.254	23.20	1.17	0.76	0.69	2.70	±0.10
	20	21/0.18	36.70	0.95	0.76	0.69	2.47	±0.10
	22	17/0.16	59.40	0.76	0.76	0.69	2.28	±0.10
	24	7/0.20	94.20	0.61	0.76	0.69	2.13	±0.10
	26	7/0.16	150.00	0.48	0.76	0.69	2.00	±0.10

Marking: E211048 AWM STYLE 3285 NO. AWG 125°C 300V EPDM QIFURUI AWM I A 125°C 300V FT2 -LF-

SAE COLOR SERIES

* STOCK COLOR CHART				
00-BLACK	01-WHITE	02-RED	03-YELLOW	04-GREEN
05-BLUE	06-BROWN	07-GREY	08-ORANGE	09- VIOLET

PACKAGE

*PACKAGE					
Part No.	Packing- FT/roll				
14~16AWG	<input type="checkbox"/> 250Ft	<input type="checkbox"/> 500Ft	<input checked="" type="checkbox"/> 1000Ft	<input type="checkbox"/> 2000Ft	
18~26AWG	<input type="checkbox"/> 250Ft	<input type="checkbox"/> 500Ft	<input type="checkbox"/> 1000Ft	<input checked="" type="checkbox"/> 2000Ft	

According to customer requirements for packaging packaging